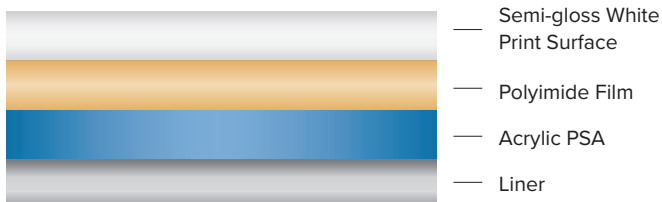


2 MIL SEMI-GLOSS WHITE POLYIMIDE LABEL

POLYONICS XF-582 is a 2 mil (50 µm) polyimide film with a high-temperature, permanent, pressure sensitive acrylic adhesive and a high opacity, semi-gloss white topcoat specifically designed for thermal transfer printing and applications requiring low outgassing.

XF-582

FEATURES

- Durable thermal transfer printable top surface
- Low out gassing adhesive
- UL 969 recognized
- REACH and RoHS compliant
- Dimensionally stable at high temperatures
- Chemically resistant
- Heat, cold, solvent resistant
- Passes the requirements of MIL-STD-202G, Notice 12, and Method 215K and MIL-STD-883E, Notice 4, Method 2015.13
- The print resists smearing when board and label are directly removed from a reflow or wave solder environment

APPLICATIONS

- Top and bottom side identification of circuit boards
- High resolution printing
- ID and tracking for applications requiring low outgassing
- Auto apply

SPECIAL CONSIDERATIONS

- Intended for industrial use only
- The surface on which the label is applied should be clean, dry and free of any contamination, such as dust, oil or rust. Isopropyl alcohol is recommended to clean the surface.
- Use firm pressure when applying label to increase the physical contact of the adhesive with the surface.
- Pressure sensitive adhesives will provide stronger bonds to warm surfaces by increasing adhesive flow and peel strength.
- Preheating the labeled product can enhance print permanence for cases of extreme solvent and/or abrasion exposure.
- Topcoat and print should not be contacted while exposed to elevated temperature.

TECHNICAL DATA

Properties	Test Method	Average Results (Imperial Units)		Average Results (SI Units)
Thickness	ASTM D-1000			
Top Sheet		2.4 mil		61 µm
Adhesive		2 mil		50 µm
Total		4.4 mil		111 µm
Adhesion	Polyonics 80313			
Stainless Steel	20 minute dwell	≥ 35 oz/in		≥ 38 N/100 mm
	24 hour dwell	≥ 40 oz/in		≥ 44 N/100 mm
Tack	Polyonics 80155	≥ 1200 g/in		≥ 47 g/mm
Weatherometer Testing	ASTM G154	No visible effect		
Out Gassing ¹	ASTM E595	Pass - TML < 1.0%, CVCM < 0.1%, WVR ≤ 1.0%		
Flamability	UL 510 OANZ2	Pass		
UL510 File #		E323067		
Temperature Rating	Long Term	100 hrs @ 302 °F		100 hrs @ 150 °C
	Operating	5 min @ 500 °F		5 min @ 260 °C
	Short Term	90 sec @ 572 °F		90 sec @ 300 °C
Shelf Life	1 year below 80 °F (27 °C) and 60% R.H.			
UL File #	PGJ12.MH19503			
UL Approved Ribbons	DNP R510 HF, Ricoh B110CR, Ricoh B110C, Armor AXR7+, Armor AXR8			

DURABILITY TESTING: HEAT/CHEMICAL

Test Method	Test Environment	SC ²	MOD ³
Polyonics 80386	Control 158 °F (70 °C), 5 min.	≥ B grade	≥ B grade
	Alpha Metals Inc. 2110 Saponifier 6%, aqueous, 158 °F (70 °C), 5 min.	≥ B grade	≥ B grade
	Isopropanol 99% 158 °F (70 °C), 5 min	≥ B grade	≥ B grade
	Kyzen XJN+, 30%, 158 °F (70 °C), 5 min.	≥ B grade	≥ B grade

DURABILITY TESTING: CHEMICAL RESISTANCE

Test Method	Test Fluids	Results
MIL-STD-202G, Notice 12, Method 215K, MIL-STD-883E, Notice 4, Method 2015.13	1 part IPA, 3 parts mineral spirits	No visible effect
	Terpene Defluxer	No visible effect
	Saponifier	No visible effect

NOTES:

All values shown are averages and should not be used for specification purposes.

Adhesion and tack values have a 15% tolerance allotted to the above values stated.

All SI units are mathematically derived from U.S. conventional units.

¹For the low-outgassing test report, please contact Polyonics

²SC=signal contrast, measured via Web Scan TruRemote Wide Angle per ISO 15415.

³MOD=modularity, measured via Web Scan TruRemote Wide Angle per ISO 15415.

References: ASTM: American Society for Testing and Materials (U.S.A.) SI: International Systems of Units.

POLYONICS MATERIAL COMPLIANCE

RoHS (Restriction of Hazardous Substances) EU Directive 2002/95/EC	Limits set forth in Directive 2011/65/EU
REACH (Registration Evaluation and Authorization of Chemicals) EU Directive 1907/2006/EC	Limits set forth in Directive 1907/2006/EC Article 7 (2)
Halogen Free - Restriction use of Halogen (IEC 61249-2-21)	Limits set forth in International Electrochemical Commission

WARRANTY-LIMITATION

Polyonics' products are sold with the understanding that the Buyer will test them in actual use and determine for him/herself their adaptability to his/her intended uses. Polyonics warrants to the buyer that its products are free from defects in material and workmanship, but limits its obligations under this warranty to replacement of the products shown to Polyonics' satisfaction to have been defective, provided that the Buyer has complied with the handling, storage and shelf life requirements as specified by Polyonics in applicable materials specifications.

The above warranties extend solely to Buyer and all warranty claims must be made by the Buyer. Rework or Replacement shall neither exceed nor decrease the original warranty period.

THE ABOVE WARRANTIES ARE EXCLUSIVE OF AND IN LIEU OF ALL OTHER WARRANTIES, WRITTEN OR ORAL, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE. NO IMPLIED STATUTORY WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE SHALL APPLY. POLYONICS SHALL NOT BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL OR CONSEQUENTIAL, ARISING OUT OF THE USE OR INABILITY TO USE THE PRODUCT, OR FROM DELAY IN THE REPLACEMENT OR REPAIR OF PRODUCTS UNDER THE ABOVE WARRANTY.

September 2019



Polyonics World Headquarters
28 Industrial Park Drive
Westmoreland, NH 03467 U.S.A.

Ph: 603.352.1415
Fax: 603.352.1936
Email: info@polyonics.com

Polyonics Asia
Fuweo Mansion Rm 411
Hongtu Road 88
Nancheng District
Dongguan, Guangdong, China 523078

Ph: 86.755.8825.0441
Fax: 86.755.8825.2429
Email: infoasia@polyonics.com

polyonics.com

