


dB-4150 Microwave Power Module

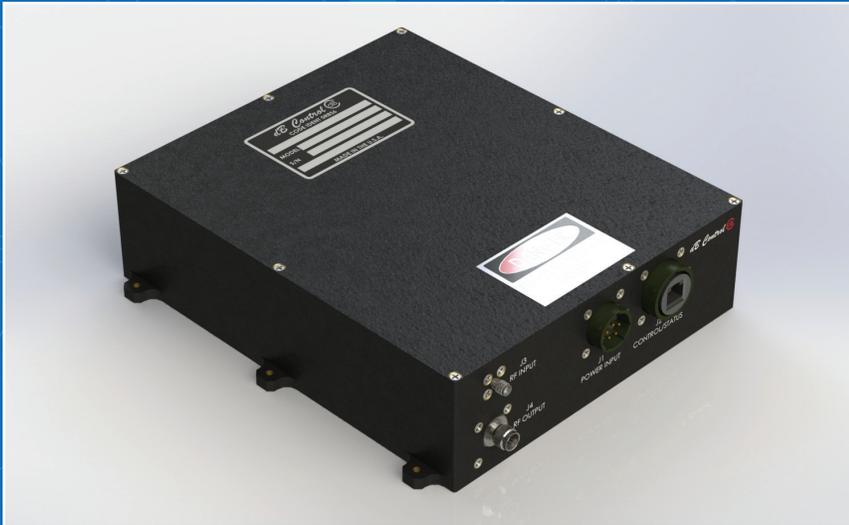

100W CW
6 – 18 GHz

The dB-4150 is a smart microwave power module (MPM) operating in the frequency range of 6 to 18 GHz. This MPM is a power amplifier that provides 100 Watts pulsed/CW RF output power. The RF signal path consists of a solid state amplifier and a vacuum power booster. The power supply topology uses proprietary low-noise, high-efficiency designs to operate the RF signal path. A high-speed modulator is incorporated for pulse modulation of up to 10 KHz to CW. This compact, conduction-cooled MPM is designed to operate in extreme military environments.

Features

- Smart MPM
- 6 to 18 GHz, 100 W, pulsed to CW
- High PRF pulse modulation
- Forward/reverse power monitor
- Ethernet interface
- Excellent reliability

Applications

- Electronic countermeasures (ECM)
- Electronic warfare (EW) simulation

dB-4150 Microwave Power Module Specifications

Reliability by Design®

Electrical

Frequency Range	6 to 18 GHz
Output Power	100 Watts CW
Pulse Operation	PRF: 10 KHz max. Pulse width: 1.0 µsec to CW
Gain at Rated Power	50 dB
Harmonics	-4 dBc @ 6.0 GHz
Spurious	-50 dBc
Input VSWR	2.0:1 (50 Ω Impedance)
Load VSWR	1.5:1, max. for full specification compliance
Prime Power Input	270 VDC (or 28 VDC option)
TWTA Protection	Helix Over-Current, Cathode Over-Voltage, Over-Temperature, reflected RF power
Status/Indication	Equipment status, faults, forward/reverse power
Interface Control	Ethernet
Modulation Control	Differential or TTL

Mechanical

Connectors:	
RF Input	SMA (F)
RF Output	Type TNC (female)
Prime Power	MS3112E14-5P
Control/Pulse Input	MS3112E14-18P
Ethernet	TBD
Dimensions	12.9" (L) x 9.4" (W) x 2.6" (H)
Weight	13 lbs.
Cooling	Conduction

Environmental

Vibration	10 to 1000 Hz, 0.02g ² /Hz
Shock	15 g, 11 msec, Half Saw Tooth
Operating Temperature	-40° C to +85° C (Base Plate Temperature)
Storage Temperature	-54° C to +85° C
Operating Altitude	Up to 50,000 feet
Humidity	Up to 95% RH Non-Condensing

Options

- 5 to 18 GHz
- Serial interface

Specifications subject to change without notice.



About dB Control

Established in 1990, dB Control Corp., a subsidiary of the Electronic Technologies Group (ETG) of HEICO Corp., supplies mission-critical, often sole-source, products worldwide to military organizations, as well as to major defense contractors and commercial manufacturers. dB Control designs and manufactures reliable high-power TWT Amplifiers (TWTAs), microwave power modules (MPMs), transmitters and power supplies with modulators for radar, electronic countermeasures (ECM), data links, and communications applications.

The company's high-power amplifiers use solid state, as well as vacuum electron devices and cover the 1 to 50 GHz frequency range. The modularity of dB Control's designs enables rapid configuration of custom products for a variety of platforms, including ground-based and high-altitude military manned and unmanned aircraft. dB Control has an outstanding record of successfully repairing, refurbishing and replacing tightly packaged high-voltage transformers, assemblies and power supplies. The company offers specialized contract manufacturing, transformer winding and testing, full vacuum encapsulation, pressure cure, conformal coating and repair depot services from its modern 52,100-square-foot facilities in Fremont, California. www.dBControl.com

dB Control
a HEICO company
Reliability by Design®

